

THIS SPACE FOR DESIGNER/ENGINEER APPROVAL


Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO# _____
Submitted by _____	Date _____	Other _____

0110 Series
Dielectric Unions
Galvanized Steel & Brass
Nylon Insulator Ring
FIP x SWT
Max Temp 232° F
ISO 9001

ITEM #	SIZE	CTN	CASE	A	B	C	D
01102	1/2"	24	144	1/2	5/8	1 7/8	1 3/8
01103	3/4"	24	96	3/4	7/8	2 1/8	1 5/8
01103-2	3/4" x 1/2"	24	144	3/4	5/8	2	1 5/8
01104	1"	12	120	1	1 1/8	2 3/8	1 7/8
01105	1 1/4"	12	72	1 1/4	1 3/8	2 5/8	2 1/4
01106	1 1/2"	12	36	1 1/2	1 5/8	2 3/4	2 3/4
01107	2"	6	24	2	2 1/8	3 1/8	3 1/2



NO.	DESCRIPTION	MATERIAL
1	CxC FITTING	BRASS
2	UNION INSULATOR	NYLON & FIBERGLASS
3	UNION WASHER	NBR
4	UNION NUT	STEEL CP
5	IPS FITTING	STEEL CP

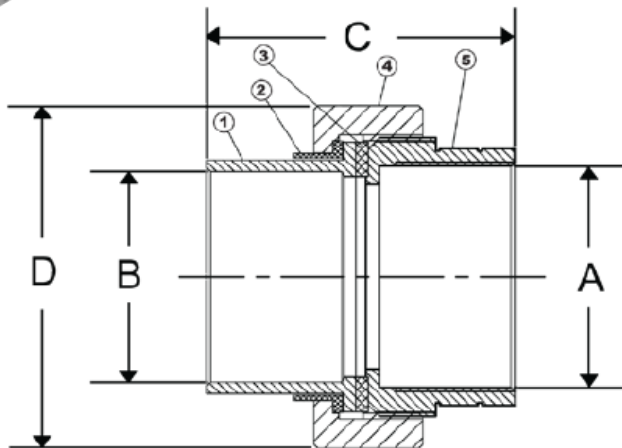

Specifications: Designed for residential, commercial or industrial use with water, oil or gas. Threaded ends comply with ANSI B1.20.1. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Other solder materials have lower pressure/temperature limits. Do not silver braze or overheat valves when soldering.



Quality and Commitment Since 1954

www.webstonevalves.com · P: (800) 225-9529 · F: (800) 336-5133

Webstone product specifications in U.S. customary units are approximate and are provided for reference only. Webstone reserves the right to change or modify product design, construction, specifications or materials without prior notice and without incurring any obligation to make such changes and modifications on Webstone products previously or subsequently sold.