



Forged DZR Brass Transition Fitting

Certifications

Certified to NSF/ANSI 61 & 372 NSF/ANSI 14 IGC 319, PS117



NO.	DESCRIPTION	MATERIAL
1	Body	Lead Free DZR Brass
2	O-Ring	EPDM

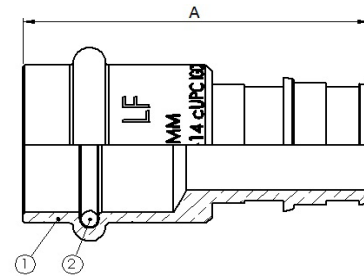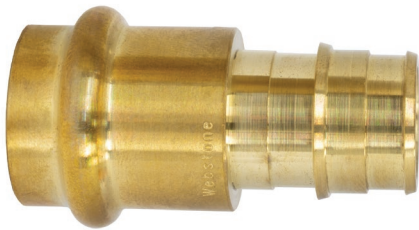

Designed for residential, commercial or industrial use. PEX end dimensions comply with the referenced ASTM specification.

ITEM#	Connection Type	SIZE (in)	Pressure Rating	Max Temp	A
H-36802W	Press x ASTM F1960 PEX	1/2	250 PSI CWP	250 F	1.73
H-36803W	Press x ASTM F1960 PEX	3/4	250 PSI CWP	250 F	2.09
H-36804W	Press x ASTM F1960 PEX	1	250 PSI CWP	250 F	2.33
H-36805W	Press x ASTM F1960 PEX	1 1/4	250 PSI CWP	250 F	2.71
H-36806W	Press x ASTM F1960 PEX	1 1/2	250 PSI CWP	250 F	3.26
H-36807W	Press x ASTM F1960 PEX	2	250 PSI CWP	250 F	4.00
H-16802W	Press x ASTM F1807 PEX	1/2	250 PSI CWP	250 F	1.65
H-16803W	Press x ASTM F1807 PEX	3/4	250 PSI CWP	250 F	1.77
H-16804W	Press x ASTM F1807 PEX	1	250 PSI CWP	250 F	1.96
H-16805W	Press x ASTM F1807 PEX	1 1/4	250 PSI CWP	250 F	2.21
H-16806W	Press x ASTM F1807 PEX	1 1/2	250 PSI CWP	250 F	2.71
H-16807W	Press x ASTM F1807 PEX	2	250 PSI CWP	250 F	3.34

