



H-86x0W Series

Forged DZR Brass Transition Fitting





NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free DZR Brass
2	O-ring	EPDM

Certifications

Certified to NSF/ANSI 61 & 372 - PS117

Lead-Free

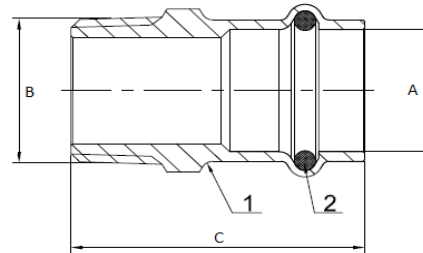

Designed for residential, commercial, or industrial use with water, oil, or glycol mix. Threaded ends comply with ANSI B1.20.1.

ITEM#	Connection Type	SIZE (In)	Max Temp	Pressure Rating	A	B	C
H-86202W	Press x MIP	1/2"	250° F Max	250 PSI CWP Max	0.50	0.50 NPT	1.69
H-86202W-R	Press x MIP	1/2" x 3/8"	250° F Max	250 PSI CWP Max	0.50	0.38 NPT	1.57
H-86202W-RX	Press x MIP	1/2" x 3/4"	250° F Max	250 PSI CWP Max	0.50	0.75 NPT	1.81
H-86203W	Press x MIP	3/4"	250° F Max	250 PSI CWP Max	0.75	0.75 NPT	1.97
H-86203W-R	Press x MIP	3/4" x 1/2"	250° F Max	250 PSI CWP Max	0.75	0.50 NPT	1.89
H-86203W-RX	Press x MIP	3/4" x 1"	250° F Max	250 PSI CWP Max	0.75	1.00 NPT	2.19
H-86204W	Press x MIP	1"	250° F Max	250 PSI CWP Max	1.00	1.00 NPT	2.17
H-86204W-R	Press x MIP	1" x 3/4"	250° F Max	250 PSI CWP Max	1.00	0.75 NPT	1.97
H-86402W	Press x FIP	1/2"	250° F Max	250 PSI CWP Max	0.50	0.50 NPT	1.54
H-86402W-R	Press x FIP	1/2" x 3/8"	250° F Max	250 PSI CWP Max	0.50	0.38 NPT	1.38
H-86402W-RX	Press x FIP	1/2" x 3/4"	250° F Max	250 PSI CWP Max	0.50	0.75 NPT	1.65
H-86403W	Press x FIP	3/4"	250° F Max	250 PSI CWP Max	0.75	0.75 NPT	1.77
H-86403W-R	Press x FIP	3/4" x 1/2"	250° F Max	250 PSI CWP Max	0.75	0.50 NPT	1.69
H-86403W-RX	Press x FIP	3/4" x 1"	250° F Max	250 PSI CWP Max	0.75	1.00 NPT	1.89
H-86404W	Press x FIP	1"	250° F Max	250 PSI CWP Max	1.00	1.00 NPT	1.89
H-86404W-R	Press x FIP	1" x 3/4"	250° F Max	250 PSI CWP Max	1.00	0.75 NPT	1.81