




## 4544W Series

The Isolator E-X-P E3 Tankless Water Heater Service Valve Kit  
 Hot & Cold Set of Full Port Forged Brass Ball Valves  
 w/ Hi-Flow Hose Drains,  
 Adjustable Pressure Relief Valve Outlet & Adjustable Packing Glands  
 Includes Residential Pressure Relief Valve (150 PSI/500,000 BTU/HR)  
 Lead Free  
 Max Operating Pressure: 500 CWP  
 Certified to NSF/ANSI 61 & 372



ITEM#	Connection Type	pressure rating	SIZE (in)	Metric Pipe Size	CTN	CASE	A	B	C	D	E	F	G	H
H-45443WPR	FIP Union x FIP	500 CWP	3/4	3/4	1	10	0.75	4.25	5.88	1.63	2.63	2.75	0.75	0.50
H-55443WPR	FIP Union x SWT	500 CWP	3/4	3/4	1	10	1.00	3.38	2.63	4.63	2.50	0.50	0.75	0.50
H-85443WPR	Press x FIP Union	250 CWP	3/4	3/4	1	10	0.75	6.85	1.63	2.63	2.75	0.75	0.75	0.50

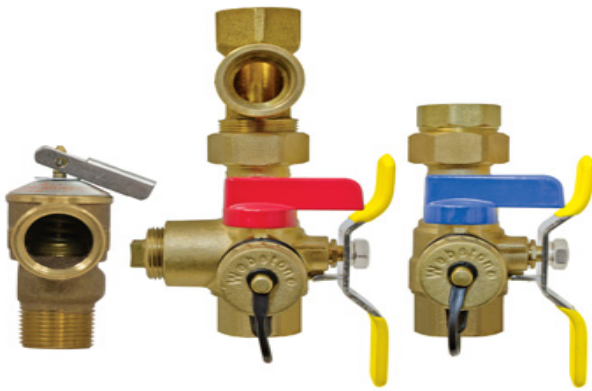

NO.	DESCRIPTION	MATERIAL
1	Body	Brass
2	Seats	PTFE
3	Ball	Brass HCP
4	Handle Nut	Stainless Steel
5	Wing Style "T" Handle	Steel CP
6	Handle Jacket	Vinyl
7	Packing Gland	Brass
8	Stem Seal	PTFE
9	Stem	Brass
10	End Cap	Brass
11	Union Nut	Brass
12	Retaining Ring	Stainless Steel
13	Union Fitting	Brass
14	Washer	EPDM
15	Drain Valve Handle	Enamel Coated Aluminum
16	Drain Valve Handle Screw	Stainless Steel
17	Cap & Strap	Brass w/ EPDM Washer & Strap
18	Relocation Adaptor (Hot)	Brass

Designed for residential or commercial use with potable water. This approved Webstone valve is actuated by a blowout proof stem and features an adjustable packing gland. Threaded ends comply with ANSI B1.20.1.

